


# Materials

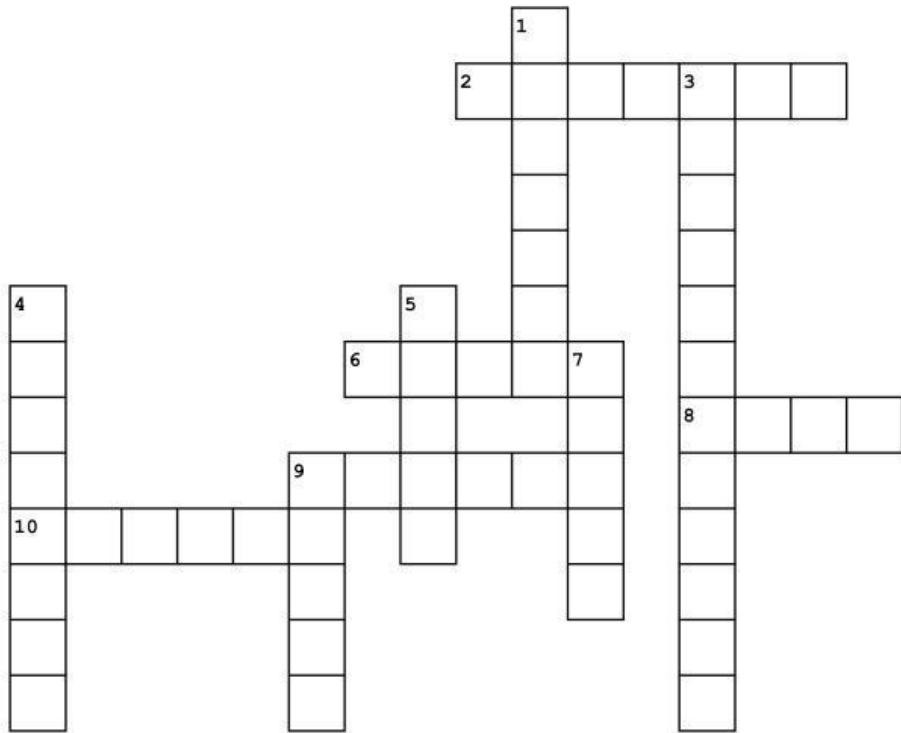

## Across

2. Very brittle material. Good insulator too.
6. Material used for making windows.
8. Expensive material, rings commonly made from this.
9. Made by mixing copper and tin.
10. One of the best insulators.

## Down

1. Metals containing iron.
3. Temperature, where material turns from solid to liquid.
4. Composite material.
5. Used to improve properties of metals.
7. Made by iron and carbon.
9. formed by mixing copper and zinc.

# MATERIALS AND THEIR PROPERTIES

**Match the adjectives with their description.**

brittle	deforms under pressure
ductile	not easily cut, broken, torn
hard	not easily broken or damaged
stiff	hard but easily broken
strong	difficult to bend or move
tough	solid or stiff and difficult to bend or break

**Explain how a tensile test works.**

It's performed by \_\_\_\_\_ a sample of material apart until \_\_\_\_\_, while measuring the \_\_\_\_\_ and \_\_\_\_\_.

The **stress** is defined by the force applied to the test sample \_\_\_\_\_ the cross-sectional area = Newtons per metre squared = metric unit for \_\_\_\_\_ = Pascals

**Strain** describes how much \_\_\_\_\_ has occurred with that applied force and it is found by dividing the change in length by the original length.

As the stress \_\_\_\_\_ the material begins to deform, this initial linear region is **elastic deformation** = if we remove the force, the material will regain its \_\_\_\_\_ shape.

The end of this linear elastic deformation is marked by the \_\_\_\_\_, from here out any additional stress will cause permanent deformation = **plastic deformation**.

The stress continues to rise until it hits the **ultimate tensile strength point** = the most stress the material can \_\_\_\_\_.

From here less stress is needed as the material begins to \_\_\_\_\_ in cross section = this is called **necking** and it continues until the material fractures.

**Why is the number of maximum allowable stress needed?**

**What happened to the ships in WWII?**

**How can you measure hardness?**

With a \_\_\_\_\_:

- 1.
- 2.
- 3.

The difference in \_\_\_\_\_ between the \_\_\_\_\_ and \_\_\_\_\_ step is then used to calculate the hardness of the material.

**Why is the steel's ability to be heat treated important?**