



ARDUINO IDE



Indicate the interface parts of the Arduino IDE according to the image.





1	→		4	→	
2	→		5	→	
3	→		6	→	

Join the lines according to the function of the line.

```
#include <Wire.h> ○  
float tSHT31; ○  
Serial.begin(115200); ○  
if(!tag.connectWifi()) ○  
void setup() { ○  
  Serial.println("Wifi connected"); ○  
  Adafruit_SHT31 sht31 = Adafruit_SHT31(); ○  
  display.begin(SSD1306_SWITCHCAPVCC, OLED_ADDR); ○
```

- ☐ Start the actuator with the respect configurations.
- ☐ Indicate the name of the sensor according to library.
- ☐ In the Serial Monitor shows the respect message.
- ☐ Indicate the library to use the I2C module in the ESP32.
- ☐ The variable contain the decimal numbers.
- ☐ The condition that indicates the opposite result.
- ☐ Start the Serial Monitor en the respect baudios.
- ☐ The part of code that just run once.

Connect the sensor and actuator with the ESP32.

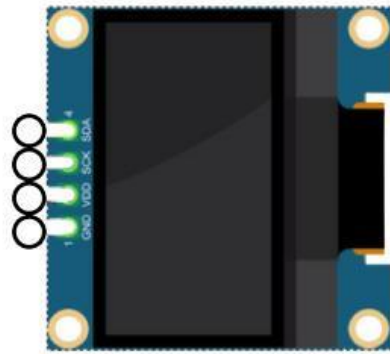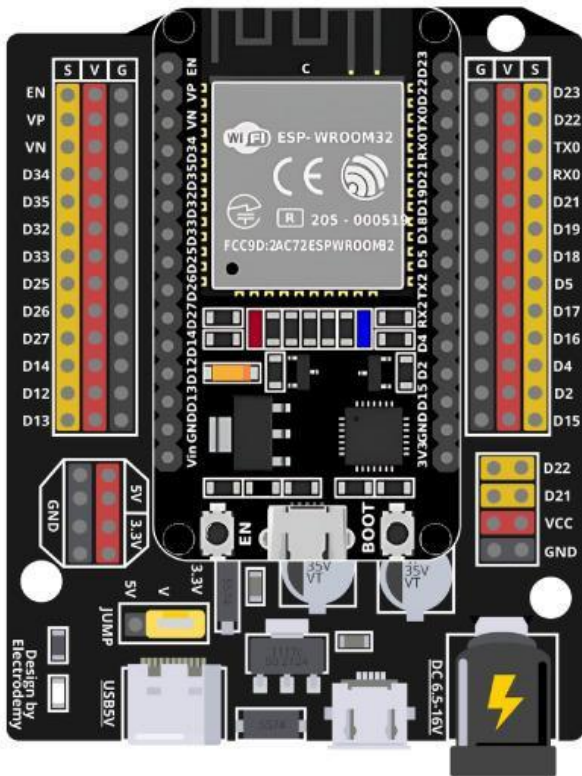

Drag the lines of the right place of the code.

```
void displayhSHT31()
{
    display.begin(SSD1306_SWITCHCAPVCC, OLED_ADDR);
    display. 
    display.setTextSize(1,2);
    display.setTextColor();
    display.setCursor(18,3);
    display.println("Relative humidity");
    display.setTextSize(3);
    display.setCursor(15,20);
    display.print();
    display.print("%");
    display.setTextSize(1);
    display.setCursor(13,44);
    display.println();
    display. 
    delay(2000);
}

void ()
{
    tag.sendData("tSHT31", String(tSHT31));
    tag.sendData("hSHT31", String(hSHT31));
    delay();
}

tago tag("", "M1s10n2025*", "e3fd1f20-3c71-4b70-acfe-e2354965b405");
```

hSHT31

"Moisture in the air"

"C Degree Celsius"

display();

BLUE

WHITE

sendtago

clearDisplay();

Aulas GBCMC

10000

displaysendtago